

Pounder's Marine Diesel Engines and Gas Turbines


Tenth Edition



Malcolm Latache



L351

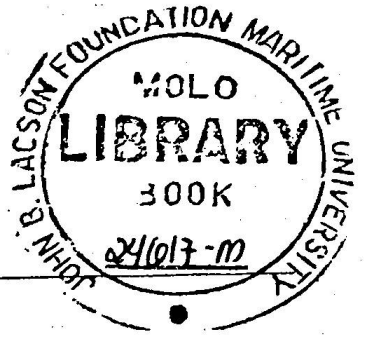

POUNDER'S MARINE DIESEL ENGINES AND GAS TURBINES



POUNDER'S MARINE DIESEL ENGINES AND GAS TURBINES

Tenth Edition

MALCOLM LATARCHE



Butterworth-Heinemann
An imprint of Elsevier

Contents

| | |
|---|-------------|
| <i>Preface</i> | <i>xiii</i> |
| <i>Introduction</i> | <i>xv</i> |
| 1. International regulations | 1 |
| Regulating NOx emissions | 3 |
| Regulating SOx emissions | 7 |
| Regulating other exhaust emissions | 9 |
| 2. Theory and general principles | 13 |
| Theoretical heat cycle | 13 |
| Practical cycles | 14 |
| Efficiency | 16 |
| Working cycles | 20 |
| Horsepower | 23 |
| Torque | 24 |
| Mean piston speed | 26 |
| Fuel consumption in 24H | 26 |
| Vibration | 27 |
| Balancing | 32 |
| Noise | 34 |
| Achieving quieter engine rooms | 36 |
| Antivibration mountings | 39 |
| Active mountings | 41 |
| Low-speed engine vibration: Characteristics and cures | 42 |
| First-order moments | 46 |
| Second-order moments | 47 |
| Axial vibrations | 51 |
| Torsional vibrations | 53 |
| Hull vibration | 56 |
| Acknowledgements | 58 |
| 3. Dual-fuel and gas engines | 59 |
| Wärtsilä 50DF engine | 66 |
| MAN 51/60DF engine | 70 |

| | |
|---|------------|
| Mean effective pressures | 199 |
| Propeller slip | 200 |
| Propeller law | 200 |
| Fuel coefficient | 202 |
| Admiralty constant | 202 |
| Apparent propeller slip | 202 |
| Propeller performance | 203 |
| Power buildup | 204 |
| Trailing and locking of propeller | 207 |
| Astern running | 208 |
| | |
| 9. Engine and plant selection | 213 |
| Diesel-mechanical drives | 215 |
| Diesel-electric drive | 221 |
| | |
| 10. Turbocharging | 231 |
| Turbocharging | 231 |
| Turbocharger designers and manufacturers | 254 |
| Turbocharger retrofits | 312 |
| Turbo compound systems | 313 |
| Turbocharger generator/motors | 317 |
| | |
| 11. Fuel injection | 319 |
| Injection and combustion | 319 |
| Injector | 323 |
| Fuel line | 324 |
| Pump | 327 |
| Developments and trends | 333 |
| Unit injector versus pump/pipe/injector | 336 |
| Electronic fuel injection | 340 |
| Common rail injection systems | 342 |
| MTU common rail system for high-speed engines | 345 |
| Wärtsilä CR system for medium-speed engines | 353 |
| Acknowledgements | 357 |
| | |
| 12. Waste heat recovery | 359 |
| Electricity from waste heat | 359 |

| | |
|---|------------|
| MAN Energy Solution's ME-GI engine family | 76 |
| VOC as a fuel supplement | 83 |
| Design features of gas-burning engines | 84 |
| 4. Exhaust emissions and control | 87 |
| Controlling NOx emissions | 87 |
| Water-based NOx reduction techniques | 90 |
| Selective catalytic reduction | 105 |
| Particulates, soot, and smoke | 110 |
| Acknowledgements | 115 |
| 5. Oil fuels chemistry and treatment | 117 |
| Refinery processes | 118 |
| Problems with heavy fuels | 120 |
| Properties of fuel oil | 124 |
| Fuel oil treatment | 139 |
| Bunkering practice | 140 |
| 6. Alternative fuels and treatment | 151 |
| Alternative fuels and decarbonization | 151 |
| Biofuels | 152 |
| Methanol | 155 |
| LNG | 157 |
| Future fuels | 160 |
| Lubes: Choices and testing | 165 |
| Lubricating oils | 165 |
| Cylinder lubricant feed rates | 171 |
| Liner lacquering | 179 |
| Lubricant testing | 183 |
| Microbial contamination of fuels and lubricants | 185 |
| Lube oil contamination | 189 |
| 8. Performance | 193 |
| Maximum rating | 194 |
| Exhaust temperatures | 196 |
| Derating | 197 |
| Multiple engine operating profiles | 198 |

| | |
|---|------------|
| L-GF and L-GB engines | 541 |
| L-GBE type engines | 545 |
| Sulzer RL-type engines | 546 |
| 18. Medium-speed engines—Introduction | 561 |
| The four stroke engine | 562 |
| Power extremes | 566 |
| Power potential | 568 |
| 19. Anglo Belgian Corporation | 573 |
| 20. Caterpillar | 581 |
| 3600 series | 582 |
| 3618 (bravo) engine | 585 |
| C280 engine | 587 |
| 21. MaK (Caterpillar Marine Power Systems) | 591 |
| M32 engine | 593 |
| M32C engine | 600 |
| M43 engine | 601 |
| M43C engine | 604 |
| C-versions | 606 |
| Dual-fuel DF-versions | 607 |
| E-versions | 608 |
| Low emissions technologies | 609 |
| Common rail fuel system | 612 |
| Earlier MaK models | 616 |
| 22. MAN Energy Solutions | 617 |
| L58/64 engine | 617 |
| 32/40 engine | 633 |
| 48/60B engine | 642 |
| L27/38 and L21/31 engines | 647 |
| V28/33D engine | 653 |
| Common rail engines | 660 |
| Dual-fuel engines | 665 |
| 23. Rolls-Royce/MTU | 667 |
| K-series | 667 |
| B-series | 669 |

| | |
|---|------------|
| 13. Low-speed two-stroke engines—Introduction | 365 |
| Intelligent engines | 374 |
| 14. MAN B&W low-speed engines | 381 |
| MC engine design features | 385 |
| Programme expansion | 390 |
| Large-bore engines | 401 |
| Water mist catcher | 409 |
| Electronically controlled ME engines | 410 |
| Reduced fuel consumption | 412 |
| Operational safety and flexibility | 412 |
| Exhaust gas emissions flexibility | 413 |
| Fuel injection system | 414 |
| Exhaust valve actuation system | 417 |
| Control system | 417 |
| Cylinder pressure measuring system | 419 |
| Starting air system | 420 |
| ME engines in service | 420 |
| Mark 9 and 10 large-bore engines | 422 |
| 15. Japan Engine Corporation low-speed engines | 449 |
| UEC design details | 455 |
| UEC eco-engine | 462 |
| Emissions reduction | 466 |
| UEC LSH series | 467 |
| UEC LSJ series | 468 |
| Cylinder lubrication | 468 |
| WinGD (Wärtsilä/Sulzer) low-speed engines | 471 |
| RTA series service and production | 474 |
| RTA design features | 477 |
| RTA design developments | 480 |
| RT-flex electronic engines | 520 |
| Generation X | 530 |
| X92DF | 536 |
| 17. Legacy low-speed engines | 539 |
| Burmeister & Wain (B&W) | 539 |
| K-GF type engines | 540 |

| | |
|--|------------|
| Lubrication | 861 |
| Air filtration | 863 |
| Marine gas turbine designs | 864 |
| Gas turbine maintenance | 888 |
| Acknowledgements | 892 |
| 28. Engine-room safety matters | 893 |
| Safety and training | 893 |
| Fire safety | 895 |
| Preventing crankcase explosions | 898 |
| Crankcase explosions and relief valves | 904 |
| Acknowledgements | 907 |
| <i>Index</i> | 909 |

| | |
|---------------------------------------|------------|
| B32:40 engine | 673 |
| B33:45 engine | 676 |
| C-engine (C25:33L) | 677 |
| Gas engines | 680 |
| B36:45 gas engine | 680 |
| 24. Wärtsilä | 681 |
| Wärtsilä Vasa 32 | 685 |
| Wärtsilä 32 | 689 |
| Wärtsilä 20 | 693 |
| Wärtsilä 26 | 702 |
| Wärtsilä 31 | 705 |
| Wärtsilä 38 | 708 |
| Wärtsilä 46 | 714 |
| Wärtsilä 64 | 725 |
| Wärtsilä dual-fuel engines | 733 |
| 25. Other medium-speed engines | 745 |
| Daihatsu | 745 |
| General Electric | 751 |
| Grandi Motori Trieste | 756 |
| HiMSEN (Hyundai Heavy Industries) | 761 |
| Mirrlees Blackstone | 767 |
| Mitsui | 770 |
| Niigata | 772 |
| Nohab | 772 |
| SEMT-Pielstick | 774 |
| SKL | 779 |
| Stork-Werkspoor diesel | 779 |
| Yanmar | 779 |
| Two-stroke medium-speed engines | 784 |
| 26. High-speed engines | 795 |
| Evolving a new design | 797 |
| High-speed engine manufacturers | 799 |
| 27. Gas turbines | 851 |
| Plant configurations | 852 |
| Cycles and efficiency | 857 |
| Emissions | 860 |

Index

Note: Page numbers followed by *f* indicate figures, and *t* indicate tables.

A

ABB Turbo Systems

- A100 series, 256, 272-274, 272*f*
 - A100-L and A200-L series, 253
 - A200 series, 256, 275-277
 - MXP series, 279-280
 - Power2 systems, 277-278
 - RR series, 255
 - self-lubricating antifriction bearings, 257
 - TPL-A series, 256
 - TPL-B series, 256
 - TPL-C series, 256, 271-272
 - TPL series, 265-270
 - TPL65 turbocharger, 267*f*
 - TPL65-A turbocharger, 265
 - TPL91 turbocharger, 269*f*
 - TPL91-B turbocharger, 270
 - TPS-D/E series, 256
 - TPS-F series, 256, 264
 - TPS57-F33 turbocharger, 264*f*
 - TPS series, 251*f*, 261-265, 262*f*
 - turbo compound systems, 313
 - turbocooling, 249
 - VTC series, 255
 - VTR turbocharger, 255
 - 4D turbocharger series, 257-260
 - generations, efficiency of, 255*f*
 - water-cooled and uncooled, 258*f*
 - VTR..1 turbocharger, 314*f*
- ABC. *See* Anglo Belgian Corporation (ABC)
- Abrasive impurities, in heavy fuel, 124
- ACERT technology, 803-804
- Acid stress, 182-183
- Active mountings, 41-42
- Active vibration compensator, 49, 50*f*
- Additives, 165-166
 - effectiveness, 177
 - microorganisms feed, 190
 - neutralization, 184

- Adhesive wear, 176-178
- Admiralty constant, 202
- Advanced electronically controlled lubrication (A-ECL) system, 467-468
- Aframax tankers, 453-454
- Airborne noise, 38-39, 41-42
- Air filtration systems, gas turbines, 863-864
- Air-fuel ratio, 62-63, 85
- Air manifold, V28/33D engine, 658
- Air swirl, 320
- Air-to-fuel ratio, 265
- Air Waste Gate (AWG), 701
- Alfa Laval centrifugal separator module, 146-147, 146*f*
- Alkalinity reserve, 184
- Alpha adaptive cylinder oil control (ACC), 409
- Alpha Lubricator system, 173, 409
- Ammonia, for diesel engines, 11, 162-163
- Anglo Belgian Corporation (ABC)
 - D36 engine, 575, 575*t*
 - dual-fuel engines, 573
 - DXS models, 573
 - DZ engine, 574-575, 574*f*
- Anticorrosion additives, 166
- Antifoam additives, 166
- Antioxidant additives, 166
- Antipolishing rings
 - medium-speed engine, 565
 - W32 engine, 684*f*
 - W64 engine, 728
- Antivibration mountings, 39-41
- Antiwear and extreme pressure additives, 166
- Antiwear performance, 178
- Ash content, of fuel oils, 129
- Asphaltenes stress, 183
- Astern running, 208-211
- Atmospheric distillation process, 118

- Carbon dioxide emissions, 152
 - dual-fuel engines, 59
 - Miller cycle, 250
- Carbon monoxide (CO), 3
- Carbon residue, of fuel oils, 128–129
- Cast-iron cylinder heads, MAN L16/24 engine, 815
- Catalytic cracking process, 90, 119
- Catalytic fines content, of fuel oils, 130
- Caterpillar, 561
 - C280 engine, 587–590
 - 3618 (bravo) engine, 585–587
 - high-speed engines, 800–804
 - 3600 series engine, 582–585
- Caterpillar Marine Power Systems (MaK), 344
- Catguard, 147
- Cavitation erosion, 340
- CBM inspection agreement, 520
- CBM report agreement, 520
- CBM virtual expert, 520
- C-engine (C25:33L), Rolls-Royce, 677–679
- Cetane number, for fuel oils, 127–128
- Charge air cooling
 - HiMSEN, 766
 - V28/33D engine, 659
 - W38A engine, 710
- Charge air humidification, 94–97
- Chemical decontamination, 186
- Chemical prevention, 186
- Chevron's Marine Combustion Improver, 139
- China State Shipbuilding Corporation (CSSC), 365, 372, 471
- Chrome-ceramic top ring, 512
- Cloud point, of fuel oils, 132
- CMB Hydroville, 161
- Coalescer, 863
- Coking, 119
- Cold filter plugging point (CFPP), 154
- Cold ironing, 218
- Combined diesel or gas (CODOG), 852–853
- Combustion air saturation system (CASS), 95
- Combustion chamber
 - gas-burning engines, 85
 - large-bore engines
 - piston cleaning (PC) ring, 407
 - piston ring groove, 407
 - piston ring pack, 406
 - RTA engine, 472*f*
- Combustion equations, of fuel oils, 134–137, 135*t*
 - heat evolved, 136*t*
 - volumetric meaning of, 136*t*
- Common rail (CR) system, 63–64, 343
 - advantages, 344
 - fuel injection systems, 319
 - injection systems, 342–344
 - MaK engines, 612–616
 - MAN Diesel, ME-GI engine, 79
 - MAN energy solutions
 - 32/44CR engine, 662–663
 - 45/60CR engine, 663
 - 48/60CR engine, 663
 - 45/60CR V12, 664–665
 - pumping principle, 344
 - servo oil system, 414
 - Wärtsilä, 706–707, 724
- Compensator(s), 49
- Computational fluid dynamics (CFD), 729
 - Hyundai Heavy Industries, 763
- Connecting rods
 - B32:40 engine, 675
 - Caterpillar 3600 series, 582
 - Daihatsu, 749
 - HiMSEN, 765
 - MB430 engine, 767
 - M32 engine, 597–598, 598*f*
 - V28/33D engine, 658
 - W38A engine, 710
 - Wärtsilä Vasa 32 engine, 686
 - W64 engine, 728–729
 - Wichmann engines, 787
- Constant pressure turbocharging, 235, 242, 242*f*, 542–544
- Continuous service rating, 384
- Contract maximum continuous rating (CMCR), 475
- Control and protection card (CPC), 341

- Automatic flexible rating (AFR) control system, 459
- Automation system
 common rail (CR) fuel injection, 563–564
 high-speed engines, 848–850
 W64 engine, 733
- Auxiliary power generation, 216–218
- Auxiliary pumps, Wichmann engines, 788
- Axial vibrations, 51–53
- B**
- Balancer gear, 479
- Balancing, 32–34
- Barcelona Convention, 7
- Base number (BN), in lubricants, 184
- Bearing Overheating Monitoring System (BEAROMOS), 903
- Bearings
 B32:40 engine, 675
 Caterpillar 3600 series, 582
 Daihatsu, 749
 turbochargers, 257, 263, 280, 290
 V28/33D engine, 658
 W38A engine, 710
 Wärtsilä Vasa 32 engine, 686
 W64 engine, 728
 Wichmann engines, 788
- BeHydro project, 161–162
- B32:40 engine, Rolls-Royce, 673–676
- B33:45 engine, Rolls-Royce, 676–677
- Benzene emissions, 59
- Bergen Diesel, 74, 565–566
- Bergen's C-series (C25/33) diesel engine, 75
- Bergen's KV-G4 gas engine, 75
- Bergen spark-ignition lean-burn gas engine technology, 74
- B36:45 gas engine, Rolls-Royce, 680
- Biocides, 188
- Biodiesels, 154–155. *See also* Biofuels
- Bioethanol, 152. *See also* Biofuels
- Biofuels, 11, 152
 first-generation, 153
 issues, 154
 second-generation, 153
 third-generation, 153
- Biomethane, 155. *See also* Biofuels
- Biosurfactants, 186
- Black carbon (BC), 3
- Black sludge formation, 182
- Block pumps, 326
- Blow-off pressure, 323
- BlueDrive PlusC, 224
- Boil off gas (BOG), 572
- Bolnes VDNL 150/600 two-stroke engine, 792, 792*f*
- Booster fuel injection valve (BFIV), 445
- Bore-cooled cylinder liners, 477
- Bosch fuel pumps, 457–459
- Bosch scale, 113
- Bottom dead centre (BDC), 233–234, 250
- Boundary lubrication, 176
- Brown Boveri and Cie (BBC), 254
 VTR. series, 254
- Brown Boveri-type VTR 501 turbocharger, 244*f*
- B-series, Rolls-Royce, 669–673
- Büchi, Alfred, 254
- Bunker delivery note (BDN), 143
- Bunkering practice, for fuel oils, 140–149
- Bunker quality testing, for fuel oils, 144
- Burmeister & Wain (B&W), 381
- Burnability, of heavy fuel, 122
- BV engine, Rolls-Royce, 671–673
- B&W uniflow scavenged engines, 541*f*
- C**
- Calculated carbon aromaticity index (CCAI), 128
- Calnetix Magnaforce generator, 318
- Calnetix Technologies, 364
- Calorific value, of fuel oils, 125–126
- Camshaft gear, 479
- Camshafts, 326
 Daihatsu, 749
 HIMSEN, 765
 MB430 engine, 767
 V28/33D engine, 658
 W38A engine, 710
 Wärtsilä Vasa 32 engine, 687
- Carbon-cutting ring, 565–566

- Detroit Diesel Corporation (DDC), 797
 - Deutz high-speed engines, 807–808
 - DF-ready engines, 532
 - Diesel–electric drive, 221–229
 - combined systems, 229
 - ease of control, 226–227
 - economical part-load running, 226
 - environmental protection, 227
 - flexibility of layout, 224–225, 224f
 - load diversity, 224f, 225–226
 - low noise, 227
 - podded propulsors, 227–229
 - ship safety, 227
 - Diesel–electric tanker, 224f, 225
 - Diesel engines
 - SOx emissions, 7
 - thermal efficiency, 61f
 - Diesel engines, Wärtsilä, 681
 - cylinder pressure limit, 683f
 - medium-speed oil-fuelled engines, 682t
 - Diesel fuel oil supply system, for Wärtsilä DF engine, 67, 68f
 - Diesel–mechanical drives, 215–221
 - auxiliary power generation, 216–218
 - father-and-son layouts, 220–221
 - geared drives, 218–220
 - Direct-coupled propulsion engine, 216
 - Direct injection, 321–322
 - Direct water injection (DWI) technique, 92–94
 - Dispersants, 166
 - Distributed control unit (DCU), W64 engine, 733
 - Divergent circular arc (DCA) diffuser design, 282–283
 - DK-28 engine, Daihatsu, 746f
 - Dominant medium-speed engine maker, 681
 - Dorthe Maersk*, 254
 - Double-acting engines, 24
 - Double-walled HP fuel lines, 351–352
 - Dribble, 322
 - Dry low-emissions (IDLE) technology, 861
 - Dry scrubber, 9
 - Dual-fuel (DF) engines, 59, 455
 - 32DF engine, 64
 - 50DF engine, 66–70
 - driving factors, 59–60
 - gas-diesel engines, 73–74
 - gas engines, 74–75
 - MaK, 607–608
 - MAN 51/60DF engine, 70–75
 - MAN energy solutions, 665–666
 - reliability, 64
 - SaCoS management system, 73
 - Wärtsilä, 733–743
 - Wärtsilä 31 engine, 706
 - Dual fuel ready, 533
 - Dyne, 35
 - DZ engine, Anglo Belgian Corporation's, 574–575, 574f
- ## E
- Eco cylinder controller (ECC), 464–465
 - EcoEGR, 101, 103
 - modes of, 101, 103
 - Ecoengine fuel injection, 464f
 - Eco main controller (EMC), 464
 - Economical part-load running, 226
 - Economic continuous rating (ECR), 594
 - Elastomer-based mounting systems, 39–40
 - Electrically driven oil supply, 431
 - Electric propulsion, 224
 - Electro-Motive Division (EMD), two-stroke medium-speed, 788
 - Electronically controlled cylinder lubrication (ECL) system, 465
 - Electronically controlled engine, 198
 - Electronically controlled hydraulic systems, 377f
 - Electronic control module (ECM), Caterpillar, 615, 803
 - Electronic control system (ECS) Caterpillar, 801
 - CR injection system, 346–347
 - Electronic engine controller (EEC), 887
 - Electronic exhaust valve actuation (ELVA), 413
 - Electronic fuel control, 342
 - Electronic fuel injection (ELFI), 413, 433–434
 - Electronic gas injection (ELGI) valves, 78–79

- Controllable injection timing (CIT), 457–459, 458*f*
 - Controllable pitch (CP) propeller, 213, 218–220, 226–227
 - Controlled common rail (CR) fuel injection, 563
 - Controlled swirl scavenging (CSS), 455
 - Conventional injection systems, 347
 - Cooling system
 - Caterpillar 3600 series, 584
 - L27/38 engine, 650, 652*f*
 - M32 engine, 595–597
 - V28/33D engine, 659
 - W64 engine, 731–732
 - Cracking process, 118
 - Crankcase, V28/33D engine, 657
 - Crankcase explosions
 - prevention, 898–904
 - relief valves, 904–907
 - Crankshaft, 29
 - B32:40 engine, 673*f*, 675
 - Caterpillar 3600 series, 582
 - Daihatsu, 749
 - HiMSEN, 765
 - MB430 engine, 767
 - V28/33D engine, 657
 - W38A engine, 710
 - Wärtsilä Vasa 32 engine, 686
 - W64 engine, 728
 - Wichmann engines, 785
 - Crude oil distillation, 118
 - Cummins engines, 804–807
 - Cycloconverter system, 221–222
 - Cylinder block
 - B32:40 engine, 675
 - Caterpillar 3600 series, 582
 - Wichmann engines, 785
 - Cylinder condition monitoring system, 376
 - Cylinder control unit (CCU), 417
 - Cylinder head and valves
 - Daihatsu, 749–750
 - Wärtsilä Vasa 32 engine, 686
 - Cylinder heads
 - B32:40 engine, 675
 - 32/40 engine, 642*t*
 - HiMSEN, 766
 - MB430 engine, 767
 - M32 engine, 598–599, 598*f*
 - V28/33D engine, 675
 - W38A engine, 710
 - W64 engine, 729
 - Wichmann engines, 786
 - Cylinder jacket, L58/64 engine, 625*f*
 - Cylinder liners
 - B32:40 engine, 675
 - Caterpillar 3600 series, 582
 - Daihatsu, 749
 - 32/40 engine, 642*t*
 - HiMSEN, 766
 - L58/64 engine, 623*f*
 - MB430 engine, 767
 - V28/33D engine, 657–658
 - W38A engine, 710
 - Wärtsilä Vasa 32 engine, 686
 - W64 engine, 728
 - Wichmann engines, 786
 - Cylinder lubrication, 379, 468–469
 - adhesive wear, 176–178
 - antiwear performance, 178
 - corrosive wear, 175–176
 - feed rates, 171–179
 - and fuel sulphur levels, 169–171
 - function of, 167
 - medium-speed engine system oils, 178–179
 - Wärtsilä RTA84T engine, 499
 - wear rates, 175
 - Cylinder unit concept, 564
- ## D
- Daewoo Shipbuilding & Marine Engineering CO., Ltd., 373
 - Daihatsu medium-speed engines, 745–751
 - Daihatsu single-pipe (DSP), 747
 - Data collector, 519
 - Decant oil, 120
 - Deep-sea ships, 216
 - Delphi Bryce, 336–337, 341
 - D36 engine, Anglo Belgian Corporation's, 575–577, 575*t*
 - Density, of fuel oils, 134
 - Derating, 197
 - Detergents, 166
 - Det Norske Veritas (DNV), 895

F

- Father-and-son layouts, 220–221
Fatty acid methyl ester (FAME) diesel, 152–154
Feedback control function, 463
Fire safety, 895–897
Fire Safety Systems (FSS), 895–896
Firing impulses, 29
First-order compensator, 47, 47f
First-order moments, 46–47
Five-cylinder engines, 54
Flashpoint
 of fuel oils, 132
 in lubricants, 184
Flexible camshaft technology (FCT), 603–604, 610, 610–611f
Flexible integrated Turbocharging System for Two-Stroke Engines (FiTS2), 252
Flexible manufacturing systems (FMS), 796
Fluid catalytic cracking (FCC), 117, 119
45/60CR engine, MAN energy solutions, 663
45/60CR V12, MAN energy solutions, 664–665
48/60B engine, MAN energy solutions, 642–646
48/60CR engine, MAN energy solutions, 663
Four-cylinder engines, 54
Four-stroke cycle, 20–22
Four-stroke engines
 gas–air mixture formation, 86
 lubrication, 165
 scavenging, 239
 turbochargers, 232–234, 298–299
4T50ME-GI-X test engine, 373
Freshwater cooling system, Daihatsu, 750
Fuel–fuel (DF) versions, 607–608
Fuel additives, 139
Fuel coefficient, 202
Fuel consumption in 24H, 26
Fuel injection, 568
 B32:40 engine, 675
 Caterpillar 3600 series, 584
 common rail (CR), 319
 common rail injection systems, 342–344
 Daihatsu, 750
 developments and trends, 333–335
 direct injection systems, 320
 electronic fuel injection, 340–342
 injection and combustion, 319–322
 injector, 323–324
 L21/31 engines, 650
 L27/38 engines, 650
 L58/64 engine, 629–631f
 M32 engine, 599
 MTU
 CR systems, high-speed engines, 345–353
 series 8000 engine, 351–353
 pump, 327–333, 327f
 pump/pipe/injector systems, 338–340
 timing, 329–332
 uniformity, 332–333
 unit injector, 337–338
 Wärtsilä Vasa 32 engine, 687
 W46 engine, 719–720
 W64 engine, 729–730
 Wichmann engines, 788
Fuel line pressure diagram, 324, 325f
Fuel microbial contamination
 biocides usage, 188
 operational indications of, 188
 visual symptoms of, 187–188
Fuel Oil Non-Availability Report (FONAR), 143
Fuel oils
 ash content of, 128–129
 asphaltene content of, 130–131
 bunkering practice, 140–149
 bunker quality testing, 144
 calculated carbon aromaticity index (CCAI), 128
 calorific value, 125–126
 carbon residue of, 128–129
 catalytic fines content of, 130
 cetane number, 127–128
 cloud point, 132
 combustion equations, 134–137
 compatibility, 133
 filtration systems, 145
 flashpoint, 132
 fuel additives, 139

- Electronic high-pressure cylinder lubricator, 408–409
 - Electronic system, for Wärtsilä DF engine, 63*f*
 - Electronic unit injectors (EUIs)
 - Caterpillar propulsion engine, 588
 - Scania marine engine, 849
 - Electrostatic precipitators, 115
 - Emission control areas (ECAs), in Mediterranean Sea, 7
 - Emissions, in gas turbines, 860–861
 - Emulsified fuels, 146–147
 - Emulsion injection system, 466–467
 - Energy Efficiency Design Index (EEDI), 10, 151
 - Energy storage systems, 218
 - Engine block
 - HiMSEN, 765
 - W38A engine, 710
 - Wärtsilä Vasa 32 engine, 686
 - W64 engine, 727–728
 - Engine braking, 412
 - Engine control unit (ECU), 417, 698–699
 - Engine-driven oil supply, 431
 - Engine-driven pumps, Wärtsilä 32, 690*f*
 - Engine frame, 617–620, 621*f*
 - Daihatsu, 749
 - Engine International Air Pollution Prevention (EIAPP) certificate of compliance, 4
 - Engine protection mode, 376, 379
 - Engine-room safety
 - crankcase explosions, 904–907
 - fire safety, 895–897
 - preventing crankcase explosions, 898–904
 - relief valves, 904–907
 - training, 893–895
 - Engine Vision System (EVS), Caterpillar, 803
 - Environmental protection, 227
 - Equipment Improvement Plan (EIP), 885
 - Exhaust and air intake systems, Caterpillar 3600 series, 584
 - Exhaust emissions and controls
 - benzene, 59
 - direct water injection technique, 92–94
 - exhaust gas recirculation (EGR), 97–105
 - fuel water emulsion methods, 91
 - MAN Energy Solution
 - NOx emissions reduction, 91, 95–97, 95*f*
 - water use research, 97
 - nitrogen oxides (NOx) emissions
 - exhaust emissions/control, 87–90
 - primary reduction measures, 88
 - water-based reduction techniques, 90–105
 - particulates, soot, and smoke, 110–115
 - selective catalytic reduction, 88, 105–110
 - Wärtsilä
 - medium-speed engines with direct water injection systems, 92–94
 - NOx emission reductions, 91–92, 95
 - water-based NOx reduction techniques, 90–105
- Exhaust gas bypass (EGB), 362
 - Exhaust gas cleaning process, 9
 - Exhaust gas de-NOxing technology, 459
 - Exhaust gas-fired boiler system, 360
 - Exhaust gas recirculation (EGR), 97–105, 371
 - with bypass matching, 101
 - components of, 97–98
 - EcoEGR system, 103–104
 - high sulphur fuels, 106*f*
 - with TC cut-out matching, 102–103
 - water handling system, 99–100
 - Exhaust gas scrubbers, 9, 111
 - Exhaust gas turbocharger system
 - basic arrangement of, 232*f*
 - with charge-air cooling, 237*f*
 - pressure charging, advantages of, 231–232
 - Exhaust pipes, Wärtsilä Vasa 32 engine, 687
 - Exhaust system
 - Daihatsu, 750
 - V28/33D engine, 658
 - Exhaust valve actuation, 464*f*
 - Exhaust valve system (InVA), 379
 - Exhaust valve with rotator, L58/64 engine, 624*f*
 - Expert system, 519–520
 - Explosion-relief valves, 904–905

- High-pressure gas injection system, 86
 High-pressure (HP) injection pipe, 319
 High-pressure SCR system, 109
 High-speed engines
 MTU (*see* Motoren-und Turbinen-Union (MTU))
 Niigata, 839–841
 Wärtsilä, 842–847
 Yanmar, 847–848
 High-speed engines
 automotive-derived engines, 848–850
 Caterpillar, 800–804
 Cummins, 804–807
 Deutz, 807–808
 Himsen, 808–811
 Isotta Fraschini, 811–812
 MAN 175D, 816–817
 MAN energy solutions, 812–817
 Mitsubishi, 817–818
 Moteurs Baudouin, 799–800
 HiMSEN
 high-speed engines, 808–811
 medium-speed engines, 761–766
 Horsepower, 23–24, 197
 Hull vibration, 56–57
 Humid air motor (HAM) system, for NO_x
 emission reduction, 95–97, 95*f*
 Hydraulic cylinder unit (HCU), 413
 Hydraulic jack bolts, 485–487
 Hydraulic oil power supply system, 465*f*
 Hydraulic power, 462
 Hydraulic power supply (HPS), 413
 Hydrocarbons, 2
 Hydrocurrent Organic Rankine Cycle
 (ORC) Module 125EJW, 364
 Hydrogen, in diesel engine, 161
 Hyundai Heavy Industries medium-speed
 engines, 761–766
- I**
 Idiosyncrasies, 333
 IFEP. *See* Integrated full electric propulsion
 (IFEP)
 IGF Code, 60
 adoption of, 60
 Ignition quality, of heavy fuel oils, 127–128
 Impulse turbocharging method, 242–243
- Indirect injection, 321*f*
 Inlet valve closure (IVC) timings, 250
 Insoluble products, in lubricants, 184
 Integral construction, M32 engine, 595
 Integrated energy-saving generating plants,
 217–218
 Integrated full electric propulsion (IFEP),
 222
 Integrated gas pressure regulation unit
 (iGPR), 534
 Integrated selective catalytic reduction
 (iSCR) system, 535
 Intelligent cylinder lubrication, 172–175
 Intelligent engine (IE) system, 413–414
 Intelligent fuel injection (InFI) system, 377
 Intercooled recuperated (ICR) cycle,
 Rolls-Royce, 858
 Internal recirculation (IRC) system, 295
 International Convention for the Prevention
 of Pollution from Ships
 (MARPOL), 1–2
 International Convention for the Safety of
 Life at Sea (SOLAS), 1
 International Maritime Organization
 (IMO), 1
 International regulation, 1
 Invisible smoke (IS), 112–113, 646
 Iron-based combustion improvers, 139
 ISO 8178 method, marine emission
 regulations, 111
 Isotta Fraschini, high-speed engines,
 811–812
- J**
 Japan Engine Corporation, 366
 Japan engine low-speed engines
 cylinder lubrication, 468–469
 emissions reduction, 466–467
 engine control system, 464
 low- and high-pressure turbochargers,
 450–451
 original UEC engines, 449
 small bore programme, 452–453
 two-stage turbocharging system,
 450–451, 450*f*
 UEC design details, 455–461
 UEC eco-engine, 462–466

- Fuel oils (*Continued*)
 heating chart, 147–148, 148f
 hydrogen: carbon ratios, 137t
 ISO 8217 standards, 125
 low-sulphur fuels, 137–138
 pour point of, 132
 properties of, 124–139
 sediment content, 131–132
 specific gravity, 133–134
 stability of, 132–133
 storage, 145–148
 sulphur content, 131
 treatment, 139–140
 viscosity, 127
 waste fuel oil, 148–149
 water content, 131
- Fuel quality setting (FQS), 496
- Fuel supplements. *See* VOCs
- Fuel-water emulsion (FWE)
 32/40 engine, 646f
 MAN Energy Solution, 91
- Full authority digital engine control (FADEC), 887
- Functional groupings, M32 engine, 595
- G**
- Gas admission valves (GAVs), 536–537
- Gas-burning engines, design features of, 84–86
- Gas-diesel (GD) engines, thermal efficiency of, 61f
- Gas engines, Rolls-Royce, 680
- Gas Generator, 865
- Gas turbine change unit (GTCU), 867, 890
- Gas turbines
 air filtration, 863–864
 commercial shipping, 851
 cruise ships, 229
 cycles and efficiency, 857–860
 emissions, 860–861
 fundamental components, 864–865
 general electric, 872–876
 LM2500, 873–876
 lubrication, 861–862
 maintenance, 888–892
 marine gas turbine designs, 864–888
 Marine Spey, 877–879
 Mitsubishi, 876–877
 MT30, 879–881
 plant configurations, 852–856
 Rolls-Royce, 877–888
 siemens, 868–872
 WR-21, 881–888
- Gas Valve Unit (GVU), 736
- Gear-based constant frequency generator drives, 216–217
- Geared drives, 218–220
- General Electric (GE)
 gas turbines, 872–876
 LM2500 and LM2500, 873–874
 medium-speed engines
 GE L/V250 series, 753–755
 GE V228 series, 752
- GoodFuels, 154
- Grandi Motori Trieste (GMT), 681
 A55 engine, 759f
 BL550 engine, 756f, 758f
 medium-speed engines, 756–761
- Groundwater acidification, 2
- Guide force moments, 50
- H**
- 'Half-pipe' design, 485–487
- Handysize bulkers, 467
- Hansestadt Danzig, 254
- Hans Jensen Lubricators, 469f
- Hard-coated/semi Alu-coat ring package, 429f
- Heat of combustion, of fuel oil, 125–126
- Heavy fuel oil (HFO), 80
 asphaltene content of, 130–131
 calculated carbon aromaticity index (CCAI), 128
 definition, 117
 effects of, 120–124
 gas operating mode, 59
 problems with, 120–124
 sediment content, 131–132
 treatment, 139–140
 viscosity, 127
- H21/32 engine, HiMSEN, 762–763f
- Hertzian (contact) stresses, 329
- High-aromaticity fuels, 334
- High injection pressures, 319

- Low port concept, for turbochargers, 246-247
 - Low-pressure SCR system, 109
 - Low-pressure X-DF technology, 61
 - Low-speed engine vibration, 42-46
 - Low-speed two-stroke engines
 - intelligent engines, 374-380
 - lubrication, 165
 - manufacturers and licensee production, 366f
 - Low-sulphur fuels, 137-138
 - Low temperature corrosion by heavy fuel oils, 123
 - Low thermal load, M32 engine, 599
 - Lube oil
 - contamination, 189-192
 - stress, 182-183
 - Lube oil filter, Daihatsu, 750
 - Lubricants
 - base oils and chemical additives, 165-166
 - formulator, 166
 - infection, 190
 - microbial contamination of
 - contributory factors, 186-187
 - operational symptoms of, 189-190
 - prevention procedures, 191-192
 - visual symptoms of, 189
 - synthetic, 167-168
 - testing, 183-185
 - two-stroke cylinder oils, 168-169
 - Lubricating oil module, Wärtsilä 32, 691-692f
 - Lubricating oil system
 - V28/33D engine, 659
 - Wärtsilä 20, 698
 - W64 engine, 732-733
 - Lubricating system
 - Caterpillar 3600 series, 584
 - gas turbines, 861-862
 - Lucas Bryce system, 341
 - L/V48/60 engine, 633
 - Lyra Leader installation, 465
- M**
- Magnesium-based additives, 139
 - Main control unit (MCU), W64 engine, 733
 - Maintenance assembly change units (MACUs), 878
 - MaK engines
 - common rail fuel system, 612-616
 - C-version, 606-607
 - design features, 593
 - dual-fuel versions, 607-608
 - earlier models, 616
 - E-version, 608-609
 - expert system support, 615-616
 - low emission engine, 609-612
 - M25 design, 591-592, 592f
 - M32 engine, 593-600
 - M32C engine, 600
 - M43 engine, 601-604
 - M43C engine, 604-606
 - VM43 engine, 603-604
 - MAN B&W Diesel, 365
 - MAN B&W low-speed engines
 - control system, 417-419
 - cylinder pressure measuring system
 - online and offline systems, 419-420
 - pressure measuring system (PMI), 419
 - electronically controlled ME engines, 410-411
 - exhaust gas emissions flexibility, 413-414
 - exhaust valve actuation system, 417
 - fuel injection system, 414-416
 - large-bore engines
 - bedplate, 401
 - combustion chamber, 402-407
 - cylinder liner, 408
 - electronic high-pressure cylinder lubricator, 408-409
 - fuel valve, 408
 - main bearing, 401-402
 - MC engine
 - bedplate, 385
 - camshaft, 386-387
 - connecting rod, 385-386
 - crankshaft, 385
 - cylinder cover, 386
 - cylinder frame, 385
 - cylinder liner, 386, 387f
 - exhaust valve, 387
 - framebox, 385
 - fuel oil system, 388

- Japan engine low-speed engines (*Continued*)
 UEC-LSH series, 467–468
 UEC LSJ series, 468
 'Jet/shaker' cooling principle, 491–492
- K**
- KBB turbochargers, 310–311, 311f
 K-GF type engines, 540–541
 K90MC-C engine, 398f
 K98MC-C engine, 399f
 Knocking control, in dual-fuel engines, 72
 K-series, Rolls-Royce, 667–668
 KTA50-M2 engine, Cummins, 806
- L**
- Lamellar cast iron, 477
 Lanchester balancing, 34, 57
 Large-bore engines
 bedplate, 401
 combustion chamber, 402–407
 cylinder liner, 408
 electronic high-pressure cylinder
 lubricator, 408–409
 fuel valve, 408
 main bearing, 401–402
 Late-cycle high-pressure gas injection,
 85–86
 Lean-burn DF diesel operating system, 62f
 Lean-burn Otto combustion process, 70–71
 Legacy low-speed engines
 Burmeister & Wain (B&W), 539
 K-GF type engines, 540–541
 L-GBE type engines, 545–546
 L-GF and L-GB engines, 541–544
 loop cooling, 558f
 retrofit package, 559
 Sulzer RL-type engines, 546–559
 bedplate, with thrust block, 549–550
 combustion chamber, 553
 crankshaft, 550–551
 cross head design, 554–556
 cylinder jackets, 551–553
 cylinder lubrication, 553–554
 engine frame, 551
 piston assembly, 556
 turbocharging arrangement, 557–558
 upgrading rlb engines, 558–559
 L21/31 engine, MAN energy solutions,
 647–652
 L27/38 engine, MAN energy solutions,
 647–652
 L32/40 engine, 634–635f
 L40/54 engine, MAN energy solutions, 633
 L58/64 engine, 617–633
 composite, 626f
 L40/54 engine, 633
 L/V48/60 engine, 633
 Liner lacquering, 179
 black sludge formation, 182
 fuel contributions, 180–181
 lube oil stress, 182–183
 Liner wall temperature (LWT), 537
 Liquefied natural gas (LNG), 59, 151
 benefits, 157
 bunkering station, 158
 energy density, 158
 fuel tank and processing equipment
 placement, 158
 Wärtsilä, 734, 736, 742
 Liquefied natural gas (LNG) carriers
 efficiency, 59–60
 ME-GI engine design, 76–77
 Wärtsilä 50DF engine in V12 cylinder
 form, 69, 69f
 Liquefied VOC (LVOC), 84
 Liquid gas injection (LGI), 445–446
 Liquid hydrogen, 161
 Liquid petroleum gas (LPG), 83
 L35MC engine, 381, 391–392
 L60MC engine, 381
 L70MC Mk 5 engine, 395f
 L-MC programme, 381
 LM2500, General Electric, 873–874
 Load commutated inverter (LCI), 221–222
 Load-dependent cylinder liner cooling
 system, 497–498
 Load limiter system, 376
 Local control box, 464
 Local Display Unit (LDU), 737
 L'Orange CR fuel injection, 345f
 Low emission engine (LEE), MaK engines,
 609–612
 Low NO_x burners, Wärtsilä, 683–684
 Low NO_x Vasa 32, 687–689

- performance (see Performance, marine diesel engine)
- practical cycles, 14–16
- second-order moments, 47–50
 - guide force moments, 50
 - power-related unbalance, 49
- theoretical heat cycle, 13–14
- torque, 24–26
- torsional vibrations, 53–56
 - overcritical running, 56
 - undercritical running, 55
- vibration, 27–32
- working cycles, 20
 - four-stroke cycle, 20–22
 - two-stroke cycle, 22–23
- Marine Environment Protection Committee (MEPC), 1
- Marine gas turbine, 864–888
- Marine Spey, Rolls-Royce, 877–879
- Maritime Safety Committee (MSC), 1
- Mark 9 and 10 large-bore engines
 - ME-B engines, 434–441, 437*t*
 - auxiliary blower, 440–441
 - bearings, 440
 - bore-cooled piston, 440
 - combustion chamber, 437*f*
 - connecting rod, 439
 - crankshaft, 439
 - cylinder frame, 439
 - cylinder liner, 440
 - exhaust valves, 440
 - framebox, 439
 - fuel injection system, 438
 - main bearing, 439
 - S40ME-B engine, 436*f*
 - S50ME-B engine, 435*f*
 - turbocharger models, 440
 - ME-GI gas and alternative fuel engines
 - buffer tank, 443
 - EGR system, 444–445
 - gas injection valve, 444
 - GI control and safety system, 443
 - inert gas system, 443
 - methanol booster injector valve, 446
 - sealing oil pressure, 446
 - sealing oil system, 443
 - ventilation system, 443
- Maximum continuous rating (MCR), 475–476
- MB430 engine, Mirrlees Blackstone, 768*f*
- MC engine
 - bedplate, 385
 - camshaft, 386–387
 - connecting rod, 385–386
 - crankshaft, 385
 - cylinder cover, 386
 - cylinder frame, 385
 - cylinder liner, 386, 387*f*
 - exhaust valve, 387
 - framebox, 385
 - fuel oil system, 388
 - fuel pump, 387–388
 - piston, 386
 - piston rod, 386
 - power turbines, 390
 - reversing mechanism, 388–389
 - shaft generators, 389–390
- M32C engine, MaK, 600, 604–606
- Mean effective pressure, 23–24, 199–200
- Mean piston speed, 26
- ME-B engines
 - auxiliary blower, 440–441
 - bearings, 440
 - bore-cooled piston, 440
 - combustion chamber, 437*f*
 - connecting rod, 439
 - crankshaft, 439
 - cylinder frame, 439
 - cylinder liner, 440
 - exhaust valves, 440
 - framebox, 439
 - fuel injection system, 438
 - main bearing, 439
 - S40ME-B engine, 436*f*
 - S50ME-B engine, 435*f*
 - turbocharger models, 440
- Mechanical efficiency, 19–20
- Mechanical fuel injection systems, 342–343
- Mechanical-hydraulic system, 411*f*
- Medium-range (MR) tankers, 467
- Medium-speed engines
 - Daihatsu, 745–751
 - design, 569–572
 - with direct water injection systems, 92–93

- MAN B&W low-speed engines (*Continued*)
- fuel pump, 387–388
 - piston, 386
 - piston rod, 386
 - power turbines, 390
 - reversing mechanism, 388–389
 - shaft generators, 389–390
 - ME engines in service, 420–422
 - operational safety and flexibility, 412–413
 - programme expansion, 390–400
 - reduced fuel consumption, 412
 - starting air system, 420
 - water mist catcher, 409–410
- MAN B&W ME-GA engines, 448f
- MAN B&W S70ME-C electronically controlled engine, 378f
- MAN 175D high-speed engines, 816–817
- MAN Diesel
- 51/60DF medium-speed engine, 70–71
 - cross-section, 71f
 - features, 71–72
 - gas operating mode, 73
 - ignition energy, 86
 - MC-GI low-speed DF engine, 77f
 - ME-GI engine family, 76–83
- MAN ECOCHARGE system, 300
- MAN Energy Solutions, 360–361, 449
- axial-flow TCA series turbocharger, 289f
 - 48/60B engine, 642–646
 - bore engine, 617
 - common rail engines
 - 32/44CR engine, 662–663
 - 45/60CR engine, 663
 - 45/60CR V12, 664–665
 - 48/60CR engine, 663
 - compressor wheels, for MAN turbochargers, 244–245
 - cylinder oil feed rates, 172
 - dual-fuel engines, 665–666
 - 32/40 engine, 633–642
 - exhaust gas recirculation, 100–101
 - high-speed engines, 812–817
 - L21/31 engine, 647–652
 - L27/38 engine, 647–652
 - L58/64 engine, 617–633
 - NA/S and NR/S series turbochargers, 286–288
 - NOx emissions reduction
 - humid air motor (HAM) system, 95–97, 95f
 - water-based reduction techniques, 91
 - NR/S radial-flow turbocharger, 286f
 - particulate generation, 112
 - soot particles, 112
 - TCA series, 288–295
 - TCA77 turbocharger, 288f
 - TCR series, 295–298
 - TCS/PTI system, 316f
 - TCT series, 298–300
 - TCX series, 300–301
 - Turbocharger Cut Out system, 251
 - turbo compound systems, 315–316
 - V28/33D engine, 653–659
 - VTA-equipped turbochargers, 297f
 - water use research, 97
- MAN 8L48/60B, 564
- Man–machinery interface (MMI), 887
- Maps, 198–199
- Marine diesel engine
- achieving quieter engine rooms, 36–39
 - active mountings, 41–42
 - antivibration mountings, 39–41
 - axial vibrations, 51–53
 - balancing, 32–34
 - efficiency, 16–20
 - mechanical efficiency, 19–20
 - thermal efficiency, 18–19
 - exhaust gas emissions from
 - carbon monoxide (CO), 3
 - hydrocarbons, 2
 - nitrogen oxides (NOx), 2
 - particulate matter (PM), 3
 - sulphur oxides (SOx), 2
 - first-order moments, 46–47
 - fuel consumption in 24H, 26
 - horsepower, 23–24
 - hull vibration, 56–57
 - low-speed engine vibration, 42–46
 - external unbalanced moments, 44–46
 - primary excitations, 43
 - secondary excitations, 44
 - vibration characteristics, 44
 - mean piston speed, 26
 - noise, 34–36

- gas engines, 680
 - K-series, 667-668
 - MTU/DDC designs, 831
 - series 396, 818-820
 - series 595, 820-821
 - series 1163, 821-824
 - series 2000, 832-833
 - series 4000, 833-838
 - series 8000 engines, 824-830
 - uprated series 8000 design, 830-831
 - uprated series 4000 engines, 838-839
 - MT-21 engine, Rolls-Royce, 881-888
 - MT30 engine, Rolls-Royce, 879-881
 - MTU. *See* Motoren-und Turbinen-Union (MTU)
 - MTU Diesel Engine Control (MDEC), 826-827
 - MTU Friedrichshafen, 343-344
 - Multilevel accumulator system, 513
 - Multilevel cylinder lubrication, 392
 - Multiple engine operating profiles, 198-199
 - Multi-pulse method, for turbochargers, 243
 - Multi-purpose controllers (MPCs), 438
- N**
- Napier turbochargers, 281-285
 - 457 turbocharger impeller, 283f
 - Natural gas, 59
 - combustion characteristics, 60
 - operation on, 59
 - New 350- and 400-mm bore models, 461
 - New Sulzer Diesel, 471
 - Niigata
 - high-speed engines, 839-841
 - medium-speed engines, 772
 - 980-mm-bore MC/MC-C engines, 397-400
 - 900-mm bore Sulzer RLB90 engine, 549f
 - Nitrogen oxides (NOx) emissions, 2, 466, 860
 - dual-fuel and gas engines, 59-60
 - emission controls, 3
 - emission critical components, 4
 - exhaust emissions/control, 87-90
 - exhaust gas recirculation (EGR) method, 97-105
 - levels, 384-385
 - maximum allowable NOx emission levels, 5
 - primary reduction measures, 88
 - regulating, 3-7
 - technical code-certified engines, 4
 - two stage turbocharging, 250
 - water-based reduction techniques, 90-105
 - Nohab medium-speed engines, 772-773
 - Noise Code, 36
 - Noise emissions, in turbocharger, 294
- O**
- Offshore vessel, 568
 - Oil fuels, 151
 - Oil mist, 896-897
 - Oil mist detection (OMD), 898, 900
 - On-board DC grid, 222-224
 - On-board NOx verification procedure, 4-5
 - One-node mode of vibration, 28-29, 28f
 - Online monitoring, of cylinder process, 412
 - Optimum combustion, 414
 - Optimum reversing/crash stop modes, 379
 - Optimum thermodynamic conditions, M32 engine, 595
 - Otto-cycle combustion principle, 61
 - Overcritical running, 56
 - Overload protection system (OPS), 412
- P**
- PA6B STC engine, SEMT-Pielstick, 774-775
 - Particulate emissions, 110
 - Particulate matter (PM), 3, 112
 - Passive mountings, 42
 - Performance, marine diesel engine
 - admiralty constant, 202
 - astern running, 208-211
 - derating, 197
 - exhaust temperatures, 196-197
 - fuel coefficient, 202
 - maximum rating, 194-196
 - mean effective pressures, 199-200
 - multiple engine operating profiles, 198-199
 - power buildup, 204-207

Medium-speed engines (*Continued*)

- four stroke engine, 562–566
 - four-stroke engines, 561
 - General electric
 - GE L/V250 series, 753–755
 - GE V228 series, 752
 - Grandi Motori Trieste, 756–761
 - high-performance derivative, 775–778
 - Hyundai Heavy Industries (HiMSEN), 761–766
 - Mirrlees Blackstone, 767–770
 - Mitsui, 770–772
 - Niigata, 772
 - Nohab, 772–773
 - NOx emission challenge, 89f
 - PA6B STC design, 774–775
 - power extremes, 566–568
 - power potential, 568–572
 - power spectrum, 566–567
 - SEMT-Pielstick, 774–778
 - SKL Motor, 779
 - Stork-Werkspoor diesel, 779
 - system oils, 178–179
 - two-stroke medium-speed, 784–793
 - Yanmar, 779–783
- ME engine systems, 413–414
- ME-GI gas and alternative fuel engines
- buffer tank, 443
 - EGR system, 444–445
 - gas injection valve, 444
 - GI control and safety system, 443
 - inert gas system, 443
 - methanol booster injector valve, 446
 - sealing oil pressure, 446
 - sealing oil system, 443
 - ventilation system, 443
- ME-LGI engines, 80
- methanol fuel on, 80
- ME-LGIM engines, 82
- ME-LGIP engines, characteristics of, 82–83
- M32 engine, MaK, 593–600
- M43 engine, MaK, 601–604
- Methane, 59
- Methanol, 80, 155
- advantages, 155–156
 - emission measurements, 156
 - fuel storage and treatment, 156
 - health hazards, 156–157
 - ignition enhancer, 156
 - low flashpoint fuel, 156
 - on ME-LGI engines, 80
- MET series turbocharger, 302–310
- MHI-VTI turbocharger system, 308–309
- Microbial contamination of lubricants
- contributory factors, 186–187
 - operational symptoms of, 189–190
 - prevention procedures, 191–192
 - visual symptoms of, 189
- Microprocessor-controlled engine control unit (ECU), 348
- Mid-stroke insulation, 513
- Miller cycle, 89, 249
- Mineral oil-based fuels, 154
- Mirrlees Blackstone medium-speed engines, 767–770
- Mitsubishi GS12R-MPTK engines, 61
- Mitsubishi heavy industries, 364–365
- gas turbines, 876–877
 - high-speed engines, 817–818
 - turbocharger generator/motors, 302–310, 317
- Mitsubishi Heavy Industries Marine Machinery, 366
- Mitsubishi Low-Pressure EGR (LP-EGR) system, 374
- Mitsubishi MET-SD-type turbocharger, 302f
- Mitsui medium-speed engines, 770–772
- Modular common rail fuel system (MCRS), Cummins, 805
- Modular system, M32 engine, 595
- Monobloc dry cylinder, 486f
- Monobloc frame, L58/64 engine, 617–620, 622f
- Monobloc fuel injection pump, 68
- Moteurs Baudouin high-speed engines, 799–800
- Motoren-und Turbinen-Union (MTU), 41
- B32:40 engine, 673–676
 - B33:45 engine, 676–677
 - B36:45 gas engine, 680
 - B-series, 669–673
 - BV engine, 671–673
 - C-engine (C25:33L), 677–679

- Bergen spark-ignition lean-burn gas engine technology, 74
 - B36:45 gas engine, 680
 - B-series, 669-673
 - BV engine, 671-673
 - C-engine (C25:33L), 677-679
 - gas engines, 680
 - gas turbines
 - maintenance, 888-892
 - Marine Spey, 877-879
 - MT30, 879-881
 - WR-21, 881-888
 - K-series, 667-668
 - RTA50C engines, 490-491
 - RTA58T engine, 485f
 - RTA60C engines, 473, 488-490
 - cylinder covers, 489
 - cylinder jacket, 489
 - exhaust system, 490
 - piston, 489-490
 - RTA68T-B engine, 501
 - RTA84C engines, 501-507
 - RTA84T-B engine, 499-501
 - RTA84T-D engine, 499-501
 - RTA84T 'tanker' engine, 473
 - RTA-T engine, 482-487
 - RTA96C engines, 501-507
 - RTA-2U engine, 480-482
 - RT-flex electronically controlled common-rail systems, 522f
 - RT-flex electronic engines
 - benefits of, 521-522
 - C-versions, 529
 - 82-bore series, 527-529
 - environmental performance, 525-526
 - exhaust valves, 524-525
 - fuel injection pressure, 524
 - Generation X, 530-536
 - heated fuel oil, 523-524
 - injection system, 524
 - lube oil, 525
 - RT-flex engines in service, 526-527
 - selective shut-off, 524
 - X92DF, 536-537
 - RT-flex series of engines, 474
 - Rubber-to-metal bonded systems, 39-40
 - Running-in coating (RC), 511
- S**
- SaCoS DF engine management system, 73
 - Safe management system (SMS), 893-894
 - Sankey diagrams, 16, 17f
 - Scania marine engine, 848-849
 - Scrubbers, 9
 - Scuffing, 176
 - Sealing oil, advantages of, 81
 - Secondary conversion processes, 118
 - Secondary excitations, 44
 - Secondary injection, 322
 - Second-generation Bio-Fuel Oil MD1-100, 154
 - Second-order compensator, 48-49, 48f
 - Second-order moments, 47-50
 - Sediment content, of fuel oils, 131-132
 - Selective catalytic reduction (SCR), 88, 105-110, 371
 - catalytic conversion rate, 106-107
 - de-NOx efficiency of, 107
 - for low-speed diesel engine, 108f
 - MAN 175D, 816-817
 - SEMT-Pielstick medium-speed engines, 321, 322f
 - high-performance derivative, 775-778
 - PA6B STC design, 774-775
 - Sensor multiplexing units (SMU), W64 engine, 733
 - Sequential turbocharging, 251-253
 - Motoren-und Turbinen-Union, 820
 - Sequential turbocharging (STC)
 - PA6 engine, 777-778
 - V28/33D engine, 655-656
 - Service propulsion point (SP), 384
 - 7K98MC engine, 400f
 - Ship machinery installations, 42-43
 - Ship propulsion, 384f
 - Ship safety, 227
 - Ship stopping trials, 208, 209-210t, 209f
 - Short- and long-stroke 67GF engines, 543f
 - Siemens gas turbines, 868-872
 - Signal processing unit (SPU), 902
 - Six-cylinder engines, 29-30, 56
 - Wärtsilä 46 engine, 715f
 - Wärtsilä 46F engine, 723f
 - Six-element hydraulic tool, M32 engine, 597, 597f

- Performance, marine diesel engine
(*Continued*)
- propeller
 - apparent slip, 202–203
 - performance, 203–204
 - slip, 200
 - trailing and locking of, 207
 - propeller law, 200–202
- Personal protective equipment (PPE), 893
- Physical decontamination, 186
- Physical prevention, 186
- Piston and rings
 - W38A engine, 710
 - W64 engine, 728
- Piston assembly, 389f
- Piston crown
 - with high top-land, 402
 - with Oros shape, 402
- Piston rings
 - HiMSEN, 765
 - Wärtsilä Vasa 32 engine, 686
- Piston rod, Daihatsu, 749
- Piston rod glands, 517–518
- Piston–running technology, 487
- Pistons
 - B32:40 engine, 675
 - Caterpillar 3600 series, 582
 - MB430 engine, 767
 - V28/33D engine, 658
 - Wichmann engines, 787
- Podded propulsors, 227–229
- Porous ceramic heat shield, 567
- Postweld-heat treatment (PW-HT),
427
- Pour point depressants, 166
- Pour point, of fuel oils, 132
- Power-related unbalance (PRU), 49
- Power take in (PTI) gearing, 313
- Power take-off (PTO), 531
- Power take-off/gear constant ratio
(PTO/GCR) system, 390
- Power take-off/Renk constant frequency
(PTO/RCF) system, 389–390
- Power take-out (PTO) gearing, 313
- Pressure charging
 - charge air cooling, 236–238
 - scavenging, 238–240
- Pressure mean indicator (PMI) sensors, 82,
447
- Prussen*, 254
- Primary excitations, 43
- PrimeServ, 380
- Propeller
 - apparent slip, 202–203
 - performance, 203–204
 - propeller law, 200–202
 - slip, 200–201
 - total shaft horsepower, 204
 - trailing and locking, 207
- Proportional exhaust valve actuator (PEVA),
433–434
- Propulsion market, 452
- PRU. *See* Power-related unbalance (PRU)
- Pulse converter method, for turbochargers,
243
- Pulse jet cylinder lubrication, 515–517
- Pulse system operation methods, of two-
stroke engine turbocharging,
235–236, 242f
- Pulse-width modulation (PWM) drive,
221–222
- Pump/pipe/injector systems, 338–340
 - positive features, 336–337
- PureDry separator, 149
- Q**
- QSK95 engine, Cummins, 806
- Quantum System electronics, 806
- Quasi-propulsive coefficient, 203
- R**
- Rankine cycle, 364
- Reciprocating masses, 33–34
- Refinery processes, 118–120
- Retrofits, of turbochargers, 312–313
- Revolving masses, 33
- Ricardo prechamber, 321f
- RL-type engine bedplate, 549
- RND-M engine, 548
- Robust running gear, M32 engine, 595
- Rocker arm, L58/64 engine, 631, 632f
- Rolls-Royce, 74
 - B32:40 engine, 673–676
 - B33:45 engine, 676–677

- Traditional *vs.* low inertia injectors, 325*f*
 Triangular plate framebox, 426*f*
 Tribology, 165
 Turbo blower characteristics, 240, 241*f*
 Turbochargers
 ABB Turbo Systems
 A100 series, 256, 272–274, 272*f*
 A200 series, 256, 275–277
 A100-L and A200-L series, 253
 efficiency *vs.* compressor pressure ratio, 259*f*
 MXP series, 279–280
 Power2 systems, 277–278
 self-lubricating antifriction bearings, 257
 TPL-A series, 256
 TPL-B series, 256
 TPL-C series, 256, 271–272
 TPL series, 265–270
 TPL65 turbocharger, 267*f*
 TPL65-A turbochargers, 265
 TPL91 turbocharger, 269*f*
 TPL91-B turbocharger, 270
 TPS-F series, 256, 264
 TPS57-F33 turbocharger, 264*f*
 TPS series, 251*f*, 261–265, 262*f*
 turbo compound systems, 313–314
 turbocooling, 249
 VTR 4D turbocharger series, 257–260
 VTR turbocharger
 generations, efficiency of, 255*f*
 water-cooled and uncooled, 258*f*
 VTR..1 turbocharger, 314*f*
 burst tests, 253
 cleaning, 253
 construction, 243–245
 cut out and sequential turbocharging, 251–253
 designers and manufacturers, 254–311
 and emissions/Miller cycle, 248–249
 four-stroke engines, 232–234
 generator/motors, 317–318
 KBB, 310–311
 Mitsubishi heavy industries, 302–310
 noise emissions, 294
 performance and developments, 245–248
 pressure charging, advantages of, 231–232
 retrofits, 312–313
 surging, 240–242
 systems, 242–243
 turbo blowers, 240
 two-stage turbocharging, 250–251
 two-stroke engines, 232, 234–236, 246
 V28/33D engine, 659
 VM43 engine, 603
 VTR..4E application, 259*f*
 VTR..4 series, 256–257, 261
 W38A engine, 710
 W46 engine, 722
 Turbocharging system
 B32:40 engine, 675
 Cummins, 805–806
 Daihatsu, 750
 system control, 379
 W64 engine, 731
 Wichmann engines, 788
 Turbo compound system (TCS), 313–317, 390
 Turbo compound system with power turbine and generator (TCS-PTG), 362
 Turbo generator, 360
 12-cylinder RTA84C engine, 503*f*
 Twin-engine control units (ECUs), 800
 Two key AC technologies, 221–222
 Two-node mode of vibration, 28–29, 28*f*, 31
 Two-stroke cycle, 22–23
 Two-stroke engines
 combustion products, 2
 cylinder lubricants in, 169, 172–173
 low-speed, 165
 medium-speed
 Bolnes, 792
 Electro-Motive Division (EMD), 788
 Wichmann, 784
 scavenging, 238–239
 turbochargers, 232, 234–236, 246, 299
- U**
 UEC-D-type predecessor, 450–451
 UEC 33LSII engine, 453*f*
 UEC37LSII engine, 452–453, 454*r*
 UEC 75/150 model, 449

- SKL Motor medium-speed engines, 779
- Slurry oil, 120
- Small-bore UEC-LSE engines, 461*t*
- Smart drive unit (SDU), 341
- S26MC engine, 390–391, 391*f*
- S46MC-C engine, 392, 393*t*, 393*f*
- S60MC engine, 383*f*
- S90MC-T engine, 395*t*
- Smoke emissions
- RT-flex engines, 526*f*
 - soot production, 112–113
- Smooth control, 222
- Solenoid-driven CR pilot fuel injector, 72
- Solenoid valves, 463
- Soot particles, 3
- Spark-ignited gas (SG), Wärtsilä 31 engine, 706
- Specific fuel consumption (sfc), 384–385
- Specific gravity, of fuel oils, 133–134
- Spex turbocharging, Wärtsilä Corporation, 720–722
- Spill port closure (SPC), 329–330
- Stability, of fuel oils, 132–133
- Starting system, V28/33D engine, 659
- Start-up and safety valve (SSV), 355
- Steam turbine, 360
- Stiff backbone, M32 engine, 595
- Stiffer turbocharger, 510
- Storage problems, of heavy fuel oils, 120
- Stork-Wärtsilä Diesel, 702–703
- Stork-Werkspoor diesel (SWD) medium-speed engines, 779
- Stratified fuel-water injection system, 466–467
- Stroke-bore ratios, 394
- Suezmax tankers, 453–454
- Sulphate-reducing bacteria (SRB), 186
- Sulphur content, of fuel oils, 131
- Sulphur emission control areas (SECAs), 6, 117
- Sulphur oxides (SO_x) emissions, 2, 861
- dual-fuel and gas engines, 59
 - equivalence formula, 8–9
 - exhaust emissions/control, 87
 - permissible sulphur levels, limits on, 7
 - regulating, 7–9
- Sulzer diesel engine, 365
- efficiency-booster system, 479
 - efficiency booster system layout and performance, 315*f*
- RL-type engines, 546–559
- bedplate, with thrust block, 549–550
 - combustion chamber, 553
 - crankshaft, 550–551
 - cross head design, 554–556
 - cylinder jackets, 551–553
 - cylinder lubrication, 553–554
 - engine frame, 551
 - piston assembly, 556
- 4RTA58 engine, 484*f*
- Supramax, 467
- Surging, turbochargers, 240–242
- Swirl injection principle (SIP) lubricating system, 468
- Synthetic lubricants, 167–168
- System refinements, 217–218
- ## T
- TCS/power take-in (PTI), 390
- Technical code-certified engines, NO_x, 4
- Techno-Superliner (TSL), Mitsubishi, 876–877
- Thermal cracking, 119
- Thermal efficiency, 18–19
- of diesel and gas-diesel engines, 61*f*
- Thermal stress, 183
- Thermo efficiency system (TES), 360
- The Swiss company, 365
- 32/40 engine, MAN energy solutions, 633–642
- 32/44CR engine, MAN energy solutions, 662–663
- 3512B engine, Caterpillar, 801*f*
- 3600 series engine, Caterpillar, 582–585
- Times-between-overhauls (TBOs), 402
- Timing gears, Daihatsu, 749
- Tin-aluminium (Sn40Al), 401–402
- Top dead centre (TDC), 63, 233–234
- Torque, 24–26
- Torsional vibrations, 32, 53–56
- Tough materials, M32 engine, 597
- Traditional jerk pump fuel injection system, 63

- modular design, 708
- single-stage turbocharging, 706-707
- Spex turbocharging, 720-722
- two-stage turbocharging, 706-707
- Wärtsilä 20, 693-702, 694-697f
- Wärtsilä 20DF, 734-735
- Wärtsilä 26, 702-705
- Wärtsilä 31, 65, 705-708
- Wärtsilä 31DF, 735-737
- Wärtsilä 32, 689-693, 690f
- Wärtsilä 34DF, 737-741
- Wärtsilä 38, 708-713
- Wärtsilä 46, 714-725
- Wärtsilä 46DF, 741-742
- Wärtsilä 46F, 723-725
- Wärtsilä 50DF, 571, 743
- Wärtsilä 64, 725-733
- Wärtsilä Vasa 32 engine, 685-689
- W38A specification, 710
- W38B version, 711-713
- W64 engine, 727-733
- W46 fuel injection, 719-720
- W20 layout, 699-702
- Wärtsilä dual-fuel engines
 - 32DF engine, 64
 - 50DF engine, 66-70
 - diesel fuel oil supply system, 67, 68f
 - MAN 51/60DF engine, 70-75
 - micro-pilot injection, 62
- Wärtsilä Engine Control System (WECS), 67, 70, 684, 685f, 692-693
- Wärtsilä Hamworthy VOC recovery system, 84
- Wärtsilä LNGPac system
 - bunkering station, 158
 - control system, 160
 - fuel tanks, 159
 - pressure build-up unit (PBU), 159
 - Product Evaporator circuit, 159-160
 - vessel automation system platform, 160
- Wartsila's engine control system (WECS), 354-355
- Wärtsilä Switzerland Ltd., 365
- Wärtsilä Vasa 32 engine, 685-689, 686f
- Waste heat recovery, electricity from, 359-364
- Water-based NO_x reduction techniques, 90-105
- Water content
 - in fuel oil, 121-122, 131
 - in lubricants, 184
- Water-cooled piston, 556
- Water handling system (WHS), 98-100
- Wear metal elements, in lubricants, 184
- W32 engine, antipolishing rings, 684f
- W38B engine, 711-713
- W46 'EnviroEngines', 94
- W46 fuel injection, 719-720
- W64 engine, Wärtsilä Corporation, 727-733
- Wet scrubber, 9
- Wichmann two-stroke medium-speed engine, 784
- Wide Operating Speed Range (WOSR) capability, Caterpillar, 803-804
- WinGD Integrated Control Electronics (WiCE), 532
- WinGD (Wartsila/Sulzer) low-speed engines
 - engine selection, 475-477
 - RTA design developments
 - condition-based maintenance, 518-520
 - exhaust valve behaviour, 518
 - large bore liner wear problems, 514-515
 - piston crowns, 518
 - piston rod glands, 517-518
 - pulse jet cylinder lubrication, 515-517
 - RTA50C engines, 490-491
 - RTA60C engines, 488-490
 - RTA68T-B engine, 501
 - RTA84C engines, 501-507
 - RTA84T-B, 499-501
 - RTA84T-D, 499-501
 - RTA84T engine refinements, 491-499
 - RTA96C engines, 501-507
 - RTA96C service experience, 509-510
 - RTA96C uprating and programme expansion, 507-509
 - RTA-T series, 482-487
 - RTA-2U series, 480-482
 - RT-flex 50C engines, 490-491

- Ultra-low-sulphur fuel oils (ULSFO), 137
 Undercritical running, 55
 Uniflow scavenging system, 472*f*
 Unit injector, 336–338
- V**
- Vacuum distillation process, 118
 Valve-controlled fuel injection pumps, 487
 Valve gear, V28/33D engine, 658
 Valves, Caterpillar 3600 series, 582–583
 Vanadium and corrosion by fuel oils, 123
 Vane separator, 863
 Variable area nozzles (VAN), 884
 Variable exhaust valve closing (VEC), 496
 Variable geometry (VG) turbocharger, 459
 Variable injection timing (VIT), 479
 Variable inlet valve closure (VIC), 724
 Variable multi-pulse (VMP) system, Mak, 599–600
 Variable-speed AC drive system, 222
 Variable turbine area (VTA) technology, 291
 - adjustable vanes, 297
 - shop tests and shipboard trials, 297–298
 - TCT series, 298–299
 Variable turbine geometry (VTG), 248, 265
 Variable turbine inlet (VTI), 467–468
 Variable valve timing (VVT), B32:40 engine, 679
- V12-cylinder engine, 587, 588*f*
 - B32:40 engine, 671*f*
 - Deutz, 808*f*
 - M43 engine, 601, 602*f*
 - QSK38 engine, 805*f*
- V16-cylinder engine, 349
 - Deutz, 809*f*
 - Motoren-und Turbinen-Union, 821*f*
 - MTU 2000CR engine, 832*f*
 - V28/33D engine, 653*f*
- V18-cylinder engine
 - Wärtsilä 26, 702*f*
 - Wärtsilä 38, 709*f*
- V20-cylinder engine
 - MTU series 1163 engine, 822*f*
 - MTU Series 8000 engine, 824*f*
 - V28/33D engine, 653
- V28/33D engine, MAN energy solutions, 653–659
 V50-degree configuration, 567
 Vehicle carriers, 467
 V250 engine, General electric, 753–755
 Very low-sulphur fuel oils (VLSFO), 138
 Vibration, 27–32
 Visbreaking, 119
 Viscosity
 - of fuel oils, 127
 - in lubricants, 184
- VLCC propulsion, 394
 VM43 engine, MaK, 603–604
 VOCs
 - burning system, 83, 84*f*
 - description, 83
- VTA-equipped turbochargers, 297*f*
 VTR turbocharger, 255
 - generations, efficiency of, 255*f*
 - VTR..4 series turbochargers, 256–257, 260–261
 - water-cooled and uncooled, 258*f*
- V-type engine, 570
- W**
- W38A engine, 710
 Wärtsilä, 353–357
 - common-rail fuel injection system, 113–114
 - EnviroEngine concept, 114
 - medium-speed engines
 - with direct water injection systems, 92–94
 - smokeless, 113
 - smoke test results, 114*f*
 - NOx emission reductions, 95
 - water-based reduction techniques, 91–92
 - WetPac H system, 95
 - particulate composition, 110–111
 - turbocharging, 248
- Wärtsilä Corporation, 62, 461
 - antipolishing rings, 684*f*
 - dual-fuel engines, 733–743
 - high-speed engines, 842–847
 - Low NOx Vasa 32, 687–689
 - medium-speed oil-fuelled engines, 682*t*

WinGD (Wartsila/Sulzer) low-speed engines (*Continued*)

TriboPack, for TBO, 510–513

RTA design features, 477–479

RT-flex electronic engines

benefits of, 521–522

82-bore series, 527–529

C-versions, 529

environmental performance, 525–526

exhaust valves, 524–525

fuel injection pressure, 524

Generation X, 530–536

heated fuel oil, 523–524

injection system, 524

lube oil, 525

RT-flex electronically controlled common-rail systems, 522*f*

RT-flex engines in service, 526–527

selective shut-off, 524

X92DF, 536–537

selective catalytic reduction,
108–109

Winterthur Gas & Diesel Ltd. (WinGD), 61,
365, 449

Woodward Governor, 342

Y

Yanmar

high-speed engines, 847–848

medium-speed engines, 779–783